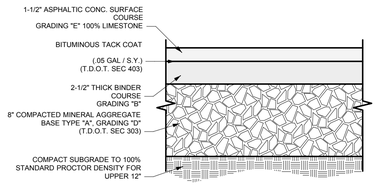

1 Heavy Duty Asphalt Pavement
Scale: 1 1/2" = 1'-0"



2 Standard Duty Asphalt Pavement
Scale: 1 1/2" = 1'-0"

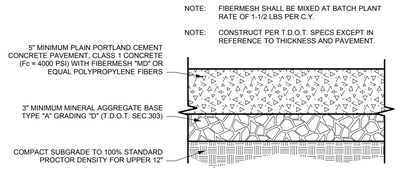

3 Concrete Paving Section
Scale: 1 1/2" = 1'-0"

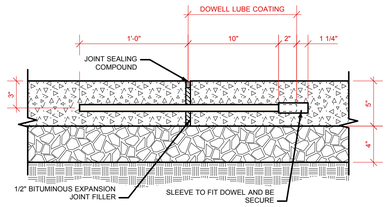

4 Concrete Expansion Joint
Scale: 1 1/2" = 1'-0"

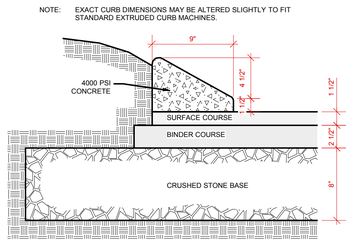

5 Extruded Concrete Curb
Scale: 1 1/2" = 1'-0"

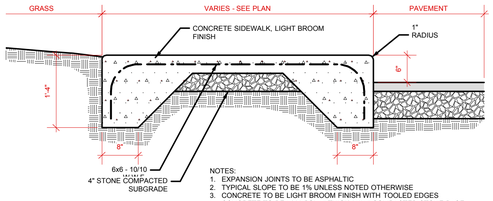

NOTES:
1. EXPANSION JOINTS TO BE ASPHALTIC
2. TYPICAL SLOPE TO BE 1% UNLESS NOTED OTHERWISE
3. CONCRETE TO BE LIGHT BROOM FINISH WITH TOOLED EDGES
4. CONCRETE TO BE 4000 PSI, 4" THICK, W/ 4" COMPACTED STONE BASE
5. CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING POSITIVE AND APPROPRIATE SLOPE TO DRAIN ALL DECKS, PATIOS, WALKS, DRIVEWAYS, FOUNDATION DRAINS, AND SWALES. REGARDLESS OF WHETHER THE PLANS GRAPHICALLY PORTRAY OR INDICATE SLOPE. FINAL CONSTRUCTION SHALL NOT PERMIT PONDING OF WATER IN ANY AREA.
6. PROVIDE TOOLED JOINTS AT 5'-0" O.C. IN ALL SIDEWALKS UNLESS NOTED OTHERWISE.
7. PREFORMED 1/2" EXPANSION JOINTS SHALL BE EQUALLY SPACED AT 50'-0" ON CENTER MAX WITH 1/4" CONTROL JOINTS SPACED EVENLY (5'-0" O.C. MAX) BETWEEN THE EXPANSION JOINTS. JOINTS IN SIDEWALKS TO ALIGN WITH JOINTS IN CURBS AND GUTTERS.

6 Sidewalk Detail
Scale: 3/4" = 1'-0"



SYMBOL TO BE PAINTED ON CURED ASPHALT OR CONCRETE PAVING. WHITE SYMBOL ON "HANDICAP BLUE" BACKGROUND

7 Handicap Parking Symbol
Scale: 3/8" = 1'-0"



8 Handicap Parking Sign
Scale: 1/2" = 1'-0"

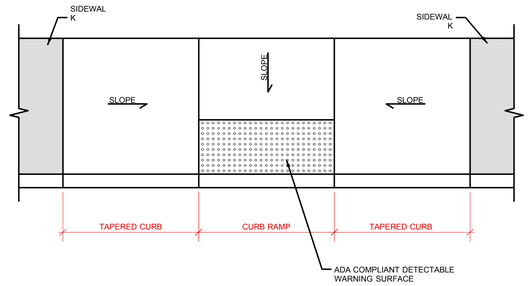

9 Handicap Ramp Detail
Scale: 3/8" = 1'-0"



10 Wheel Stop
Scale: 1 1/2" = 1'-0"

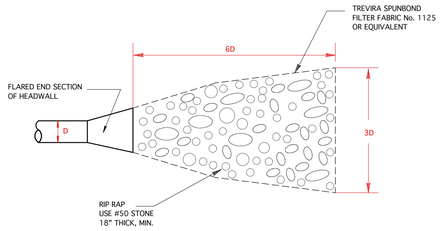

11 Storm Drain Outlet Protection
Not to Scale

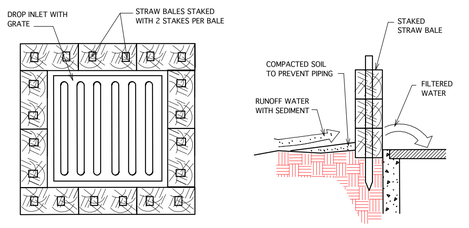

1. IN SUMP CONDITIONS PREVENT OVERFLOW OF SEDIMENT LADEN WATER BY COVERING GRATE WITH STRAW BALES AND FILTER FABRIC.

12 Inlet Sediment Trap
Not to Scale

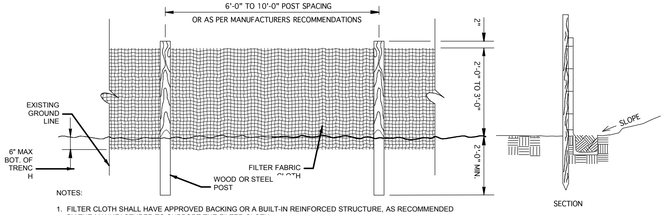

NOTES:
1. FILTER CLOTH SHALL HAVE APPROVED BACKING OR A BUILT-IN REINFORCED STRUCTURE, AS RECOMMENDED BY THE MANUFACTURER TO SUPPORT THE FILTER CLOTH.
2. FILTER CLOTH SHALL MEET THE REQUIREMENTS OF SECTION 209 OF T.D.O.T. STANDARD SPECIFICATIONS.
3. A PRE-ASSEMBLED SILT FENCE MEETING THE REQUIREMENTS OF THIS DRAWING IS ACCEPTABLE IN LIEU OF A FIELD CONSTRUCTED SILT FENCE.
4. SILT FENCE TO BE REMOVED AFTER CONSTRUCTION AND UPON APPROVAL OF THE A/E SUBJECT TO ACCEPTANCE OF UPSLOPE STABILIZATION.

13 Sediment Barrier
Not to Scale

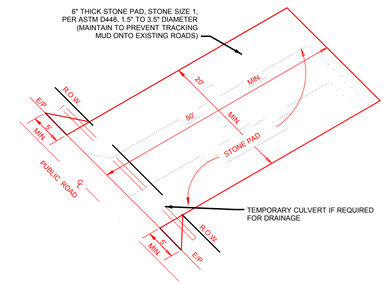

14 Construction Entrance
Not to Scale

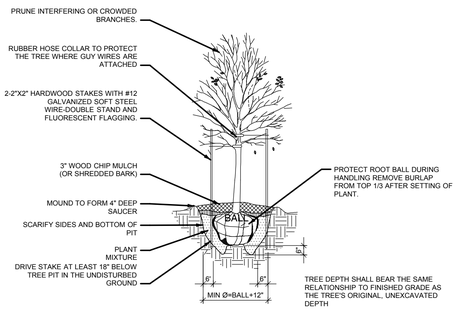

15 Tree Planting Detail
Not to Scale

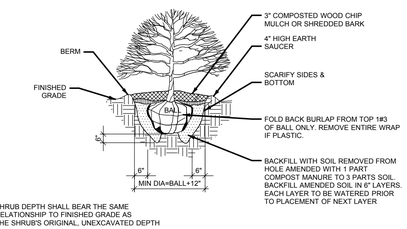

SHRUB DEPTH SHALL BEAR THE SAME RELATIONSHIP TO FINISHED GRADE AS THE SHRUB'S ORIGINAL, UNEXCAVATED DEPTH

16 Shrub Planting Detail
Not to Scale



17 Ground Cover Planting Detail
Not to Scale

revisions

print distribution

This document is the property of TWH Architects, Inc. Any use, reproduction, distribution or transmittal of this work without permission is prohibited.

AIM Center Headquarters
West Martin Luther King Boulevard
Chattanooga, Tennessee

file: 140.05
date: Sept 28, 2006

Architects • Planners • Interiors
651 East Fourth Street, Suite 500
Chattanooga, Tennessee 37403
423.756.5046 (v) 423.756.8021 (f)
www.twharch.com
TWH Architects, Inc.

sheet: C-3
Site Details